


IP AUDIO Gateway

IS-381
IS-382
IS-3840




IS-3840 IP AUDIO Gateway(include amplifier)

IS-3840 Framework

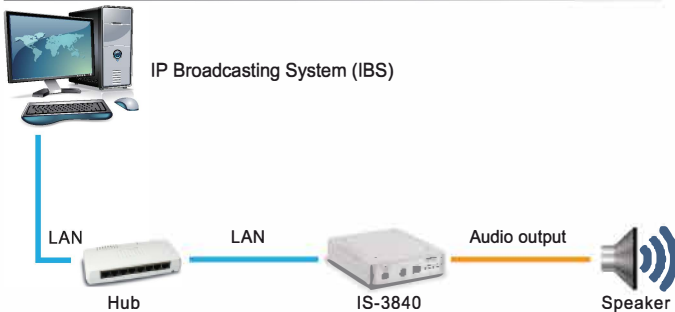

IS-381/IS-382: 1/2 Ports IP AUDIO Gateway

IS-381 / IS-382 Framework

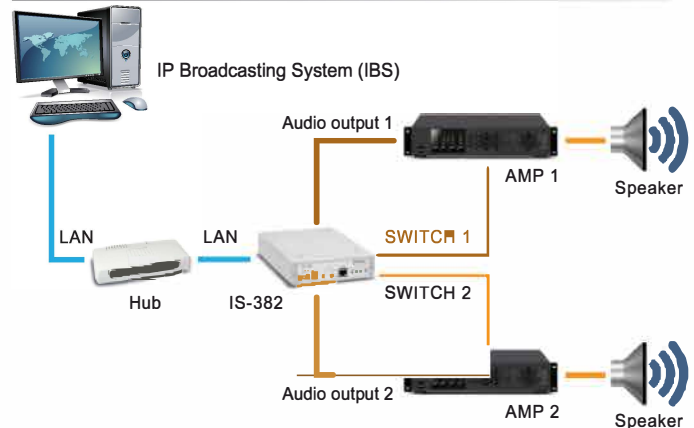

Functions

- Internet Audio Receiver with IP
- With RJ-45 port of standard 10/100Mbit Ethernet; It can make simple settings via browser with WEB interface.
- With fixed IP, DHCP and PPPoE, it can link to the internet.
- There are two independent sets of 3.5mm audio output ports that can connect independently to amplifier audio inputs (AUX IN) and convey the sound to speaker via amplifier.
- It can output the different scheduled broadcasting or voice broadcasting from the broadcasting system separately.
- Two independent sets of control output normally oper(N/O) can separately link amplifiers with external start functions.
- It supports the compression encoding format of the voice processing agreement G.711.
- It can simultaneously register 3 broadcasting system hosts

Specification

	IS-381	IS-382	IS-3840
Model No	IS-381	IS-382	IS-3840
DIM (cm)		17x14.5x4 cm	
Weight (g)	265g	270g	275g
Audio out	1 port	2 ports	1 port
Audio interface	3.5mm		European-style terminal block
Power supply	110V-240V 12V/1A		110V-240V 24V/4A
Protocol	SIP(RFC2543,RFC3261)		
Codec	G.711 u-Law, G.711 a-Law		
LAN connection	RJ45 10/100 Mbps		
Warranty	2 Years		