

# MiRiCi-E3T3

## Intelligent Miniature Ethernet to E3/T3 Remote Bridge



- E3/T3 connectivity to any Ethernet device with SFP MSA-compatible socket
- Full duplex, E3/T3 wire-speed packet forwarding
- GFP, RAD HDLC and cHDLC encapsulation
- VLAN support according to 802.1p, including VLAN stacking (Q-in-Q) capabilities for traffic separation and prioritization
- Fault propagation to LAN link
- Inband and out-of-band management for configuration, monitoring, and diagnostics
- I2C management interface for simple management integration with host devices



MiRiCi-E3T3 forwards Fast or Gigabit Ethernet packets to a TDM-based WAN at full duplex wire-speed, fully utilizing the expensive E3 or T3 TDM bandwidth.

### MARKET SEGMENTS AND APPLICATIONS

MiRiCi-E3T3 can be used in the following applications:

- Transparent LAN services over leased lines
- Remote branch connectivity over E3/T3 lines
- Connecting LANs over E3/T3 radio links or in campus applications.

### INTEROPERABILITY

MiRiCi-E3T3 operates opposite the following devices using standard GFP, RAD HDLC and cHDLC encapsulation:

- RAD's RiCi-16, RiCi-E3 and RiCi-T3
- Third-party devices that support standard GFP, RAD HDLC and cHDLC encapsulation.

### ETHERNET OVER PDH

#### Encapsulation

MiRiCi-E3T3 employs the GFP, RAD HDLC and cHDLC WAN encapsulation protocols.

### Flow Control

A flow control mechanism is activated when LAN traffic exceeds the WAN link (E3, T3) capacity and the watermarks of the internal frame buffer. Pause packets are transmitted to the LAN port, halting LAN traffic until the buffer is emptied to below the watermark limit.

### Quality of Service (QoS)

MiRiCi-E3T3 facilitates differentiated services on the same link according to Ethernet or IP marking. Classification is based on VLAN (802.1p) or Differentiated Services Code Point (DSCP) priority, while classification results are mapped to transmit priority queues. Priority queues can be defined to be Strict Priority or Weighted Round Robin (WRR).

### OAM

MiRiCi-E3T3 provides single segment (link) OAM based on 802.3ah, including discovery, continuity check, and remote fault indication.

### TIMING AND SYNCHRONIZATION

MiRiCi-E3T3 uses Tx clock sources for the internal and receive clocks. Standard statistics for 15 minute time intervals are collected.

### MANAGEMENT AND SECURITY

The unit can be monitored, configured, and tested using the following ports and applications:

- Out-of-band via the I<sup>2</sup>C channel (off the SFP edge connector)
- Inband via the Ethernet port using a Web browser.

MiRiCi-E3T3 sends SNMP traps for up to eight management stations.

To facilitate integration of a new device into an IP network, if no IP address has been manually configured, MiRiCi-E3T3 automatically requests one from the DHCP server upon booting.



# MiRiCi-E3T3

## Intelligent Miniature Ethernet to E3/T3 Remote Bridge

### OPERATION AND MAINTENANCE

#### File Operations

Application software can be downloaded to MiRiCi-E3T3 via the central server, using TFTP.

#### Configuration Adapter

An optional configuration adapter module, SFP-CA, is available for configuring MiRiCi-E3T3 by connecting it to a PC via a USB port.

The configuration adapter is used for preliminary configuration, such as assigning an IP address for first use or specifying the operation mode. It is also used to download software to the MiRiCi-E3T3 units.

### MONITORING AND DIAGNOSTICS

#### Fault Propagation

The LAN link is deactivated and the link status LED turns off if one of the following user-defined alarms is issued and fault propagation is enabled:

- LOS (Loss of Signal)
- LOF (Loss of Frame)
- FEAC (Far-End Alarm and Control)
- RLOL (Receive Loss of Lock)
- AIS (Alarm Indication Signal)
- RDI (Remote Defect Indication).

In addition, the above-listed error conditions are propagated towards the host by sending an electrical signal via the LOS pin on the MSA edge connector. The LOS LED turns ON, visually indicating the LOS condition.

#### Loopback Tests

Remote (RLB) and local loopbacks (LLB) are used for physical layer troubleshooting.

#### Loop Detection

MiRiCi-E3T3 detects loops on the LAN side or WAN side by transmitting special loop detection frames.

If a loop is detected on the LAN side, a loop detection alarm is sent.

If a loop is detected on the WAN side, the unit blocks the traffic, and only then a loop detection alarm is sent.

#### BERT

The unit also performs Bit Error Rate (BERT) diagnostic tests. MiRiCi-E3T3 generates and detects pseudo-random patterns and repetitive patterns from 1 to 32 bits in length.

## Application

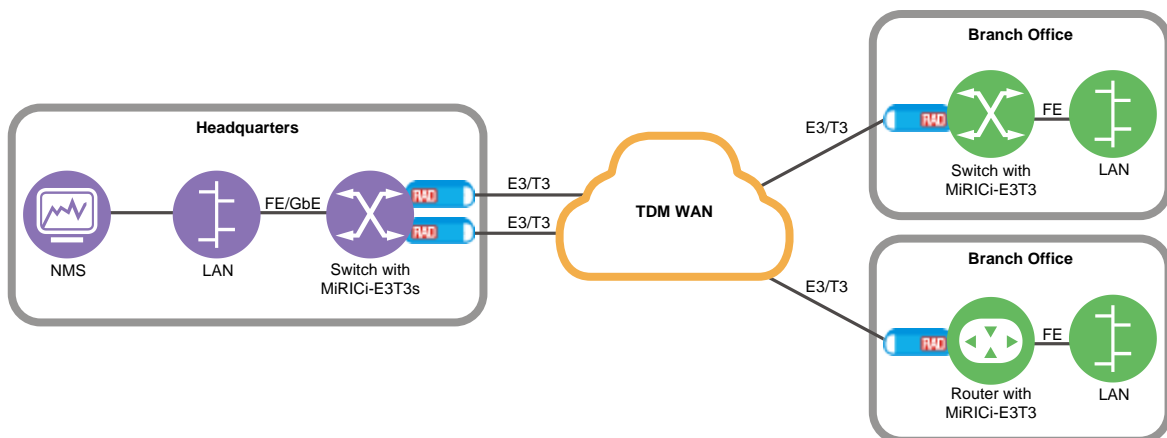


Figure 1. Transparent LAN Services over Leased Lines

## Specifications

### TDM INTERFACE

#### Number of Ports

1, configurable as E3 or T3

#### Encapsulation

GFP (G.8040, G.7041/Y.1303)  
RAD HDLC  
cHDLC

### E3 INTERFACE

#### Number of Ports

1

#### Compliance

G.703, G.775, G.823, G832, G.751

#### Data Rate

34.368 Mbps

#### Line Code

HDB3, AMI

#### Framing

Framed (G.832, G.751), unframed

#### Line Impedance

75W, unbalanced

#### Cable Length

Up to 275m (900 ft)

#### Connector

DIN 1.0/2.3

### T3 INTERFACE

#### Number of Ports

1

#### Compliance

GR-499-CORE, T1.107, T1.404, G.703,  
G.704, G.775, G.824

#### Data Rate

44.736 Mbps

#### Line Code

B3ZS, AMI

#### Framing

Framed (C-bit, M23), unframed

#### Line Impedance

75W, unbalanced

#### Cable Length

Up to 275m (900 ft)

#### Connector

DIN 1.0/2.3

### ETHERNET INTERFACE

#### Type

Fast or Gigabit Ethernet port

#### Compliance

IEEE 802.3

#### Edge Connector

SFP-based, MSA-compliant

#### Frame Size

FE: 64–2016 Bytes

GE: Up to 10 kBytes (jumbo)

### GENERAL

#### Indicators

LINK (green): Ethernet link status  
(MiRiCi-E3T3/FE)

LINK/ACT (green): Ethernet link and  
activity status (MiRiCi-E3T3/GbE)

LOS (red) – E3/T3 loss of signal

#### Power

3.3V with 1.25W dissipation

#### Environment

Temperature:

MiRiCi-E3T3/FE:

Ambient: –40 to 65°C (–40 to 149°F)

Case: –40 to 78°C (–40 to 172°F)

MiRiCi-E3T3/GE:

Ambient: –40 to 65°C (–40 to 149°F)

Case: –40 to 78°C (–40 to 172°F)

MiRiCi-E3T3/FE with temperature-  
hardened enclosure:

–40 – 85°C (–40 to 185°F)

Humidity: Up to 90%, non-condensing

#### Physical

Height: 12.4 mm (0.49 in)

Width: 14 mm (0.55 in)

Depth: 79 mm (3.11 in)

Weight: 15.0 g (0.5 oz)

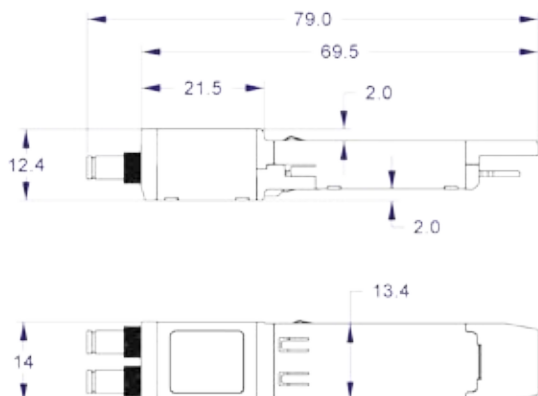


Figure 3. Physical Dimensions

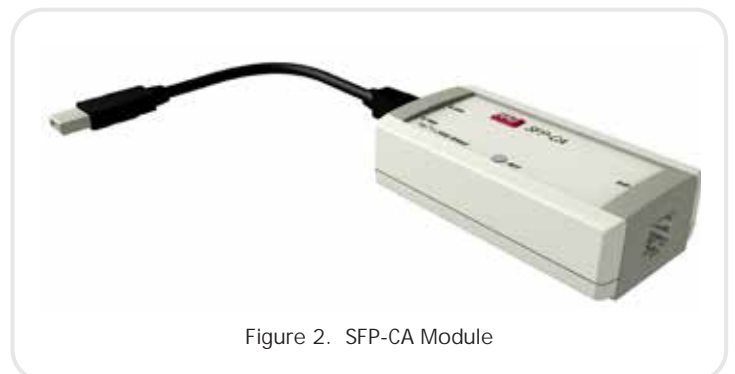


Figure 2. SFP-CA Module

## MiRiCi-E3T3

## Intelligent Miniature Ethernet to E3/T3 Remote Bridge

## Ordering

## RECOMMENDED CONFIGURATIONS

**MIRICI-E3T3/FE**

Intelligent miniature Ethernet to E3/T3 remote bridge, Fast Ethernet SFP port

**MIRICI-E3T3/GE**

Intelligent miniature Ethernet to E3/T3 remote bridge, Gigabit Ethernet SFP port

## SPECIAL CONFIGURATIONS

**MIRICI-E3T3/FE/H**

Intelligent miniature Ethernet to E3/T3 remote bridge, Fast Ethernet SFP port, hardened enclosure

**Note:** *MIRICI-E3T3 units with GbE interface are not available with temperature-hardened enclosure.*

## SUPPLIED ACCESSORIES

**CBL-MINIBNC-BNC**

Two 1m (3.28 ft) DIN 1.0/2.3 to BNC cable adapters

## OPTIONAL ACCESSORIES

**SFP-CA**

Configuration adapter module for configuring MiRiCi-E3T3 by connecting it to a PC.

Table 1. MiRiCi Family Product Comparison

Feature	MiRiCi-E1/T1 (Ver. 3.0)	MiRiCi-E3/T3 (Ver. 3.0)
Protocol type	GFP (G.8040, G.7041/Y.1303) RAD HDLC cHDLC	GFP (G.8040, G.7041/Y.1303) RAD HDLC cHDLC
Framing	G.732.N, G.732.N CRC, unframed(E1) ESF, D4, unframed (T1)	G.832, G.751, unframed (E3) C-bit, M23, unframed (T3)
QoS	VLAN priority (802.1p, strict priority, WRR)	VLAN priority (802.1p, strict priority, WRR)
Loop detection	Yes (LAN or WAN)	Yes (LAN or WAN)
Fault propagation	Yes (LOS, FDL, LOF, AIS, RDI)	Yes (LOS, LOF, FEAC, RLOL, AIS, RDI)
SNMP traps	Yes, up to 8 management stations	Yes, up to 8 management stations

Pulse Supply  
909 Ridgebrook Road., Sparks, Maryland  
21152, USA TEL : +1-410-583-1701  
FAX : +1-410-583-1704  
E-mail: sales@pulsesupply.com  
<https://www.pulsesupply.com/rad>  
[www.pulsesupply.com/rad](http://www.pulsesupply.com/rad)



data communications  
The Access Company