




Aprisa SR+

SMART, SECURE POINT-TO-MULTIPOINT RADIO VHF, 220 MHz, and UHF licensed bands



Smart, secure, industry-leading speed licensed point-to-multipoint SCADA communications for industrial monitoring and control for the electricity, water, oil and gas industries – now with 256 QAM

- **High capacity:** to meet the growing number of data-intensive applications in the SCADA environment, the Aprisa SR+ provides data rates of up to 512 kbit/s half duplex / 1,024 kbit/s full duplex in 100 kHz licensed channels.
- **Secure:** with its defense in depth approach, including AES encryption, authentication, address filtering and user access control including RADIUS, the Aprisa SR+ protects against vulnerabilities and malicious attacks.
- **Future-proof:** the Aprisa SR+ supports dual serial and dual Ethernet ports in a single, compact form factor, designed to cryptographically secure legacy serial, protect existing device investment, and enable new applications. Old and new application protocols can be run side by side.
- **Advanced L2 / L3 capabilities:** selectable L2 bridge, L3 router, or advanced gateway router combination L2 / L3 modes with VLAN, QoS, NAT, and filtering attributes to maximize capacity in constrained bandwidth and prioritize mission critical traffic while meeting tough security and IP network policy imperatives.
- **Adaptable:** the Aprisa SR+ integrates into a range of network topologies, with each unit configurable as a master station, repeater or remote station; connect multiple RTUs / PLCs to a single radio.
- **Flexible interfaces:** the data interfaces can be configured for serial or Ethernet operation; a range of options are supported, including two serial and two Ethernet, one serial and three Ethernet, or four Ethernet ports. Support for NMEA GPS receiver option.
- **Link efficiency:** Adaptive Coding and Modulation (ACM) and forward error correction maintains the integrity of the wireless connection while an effective channel access scheme and IP routing ensures efficient transfer of data across the Aprisa SR+ network. Automatic Transmit Power Control maintains the minimum transmit power required for effective communications enhancing both frequency reuse and power savings. Advanced payload and Ethernet / IP / TCP / UDP header compression.
- **Reliable and robust:** the Aprisa SR+ requires no manual component tuning and maintains its performance over a wide temperature range using full specification industrially rated components and shared Aprisa family heritage.
- **Easily managed:** an easy to use GUI supports local element management via HTTPS and remote element management over the air and SNMP support allows network-wide monitoring and control via a variety of supported third party network management systems.

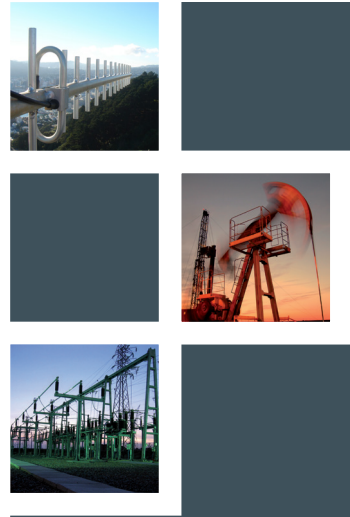

The Aprisa SR+ in brief

- VHF, 220 MHz, and UHF licensed bands
- RS-232 and IEEE 802.3 with multiple port options
- Software selectable 12.5 kHz, 20 kHz, 25 kHz, 50 kHz, and 100 kHz (note 2) channel sizes (frequency band dependent)
- Full and half duplex operation, single or dual frequency
- Data rates of up to 512 kbit/s half duplex / 1024 kbit/s full duplex
- 256, 192 or 128 bit AES encryption
- AES-CCM to NIST SP 800-38C
- Adaptive Coding and Modulation: QPSK to 256 QAM
- Automatic Transmit Power Control: reduces interference in large networks, improves power savings
- Advanced forward error correction
- Ethernet and IP / TCP / UDP header compression (ROHC) and payload compression
- Software selectable dual / single antenna port operation
- Transparent to all common SCADA protocols
- Dedicated alarm port and optional GPS for radio coordinates
- Protected station and remote station options
- Power optimized option
- Layer 2 bridge (VLAN aware), layer 3 router, and advanced gateway router combination L2 / L3 modes
- VLAN tagging and Q-in-Q
- Flexible QoS priority enforcement – by port or traffic type, VLAN, PCP/DSCP, rule including SMAC/DMAC, IP address and IP protocol, and EtherType
- L2 / L3 / L4 filtering
- MEMS accelerometer motion sensing anti-tamper option
- Substation hardened to IEEE 1613 class 2 and IEC 61850-3
- 30 kV ESD antenna protection
- Class 1, Division 2 for hazardous protection
- -40 to +70 °C operational temperature without fans
- 210 mm (W) x 130 mm (D) x 41.5 mm (H)
- Complies with EU RED (2014/53/EU)

Aprisa SR+ applications

- Electricity grid: distribution automation control and protection in MV / HV distribution / transmission
- Smart grid, DA, DFA, DER, cap bank control
- Oil & Gas: production metering, lift pump automation
- AMI / AMR: high density data concentrator backhaul
- Renewables: wind farm, tidal, hydro automation
- Water and wastewater: flow, level, pressure modulation automation and pump status

