



ADTRAN

1148VX

48-Port Sealed, Vectored FTTN



VDSL2



Sealed



Low TCO



Vectoring

Benefits

- Environmentally sealed, temperature hardened standalone VDSL2 FTTN solution enables rapid deployment of ultra-broadband services
- Delivers 100 Mbps over 3000ft from the node using bonded, vectored VDSL2
- Provides silent operation and low profile construction abiding to strict residential zoning rules
- Supports IPTV video service
- Can be mounted on a pole, pedestal, cross-box or remote terminal delivering ultra-low Total Cost of Ownership (TCO)
- Allows system scalability from 48 to 384 subscribers, with field-upgradeable 384-port system-level vectoring (SLV)
- Reduces installation cost via flexible powering options (span, AC and DC powering)

Overview

Accelerating Gigabit Services

Premium broadband services are fueling the need for pushing fiber deeper into the network and closer to the end user. However, the cost of delivering Fiber-to-the-Home (FTTH) can be both cost-prohibitive as well as time consuming, particularly in remote and rural locations. Next-generation broadband technologies such as Bonded and Vectored VDSL2 allow service providers to utilize existing copper infrastructure in combination with sealed Fiber-to-the-Node (FTTN) solutions to cost-effectively deliver ultra-broadband (100+ Mbps) and IPTV services to subscribers in all areas.

Faster Time-to-Market

The ADTRAN 1148VX compact sealed FTTN solution allows service providers to realize 100 Mbps speeds with their existing copper infrastructure, economically delivering ultra broadband services to the home using vectored VDSL2.

ADTRAN designed the standalone, weather-proof 1100 Series FTTN systems to be mounted on a pole, pedestal, cross-box, remote terminal or other challenging locations, eliminating the need for expensive cabinet enclosures, heat exchangers and site construction, which account for a large portion of the total cost of deployment. This allows for ultra-broadband services deployment within days, instead of months, dramatically lowering deployment costs.

Cost-Effectively Expand Broadband Footprint

Integrated 10 Gigabit Ethernet switching in the 1148VX Host units allows connecting up to four 1148VX nodes to create an FTTN system that scales to 192 ports in a single managed node. With an external VRM, up to eight 1148VX nodes (384-subscribers) can be supported in a single managed node, accommodating long-term growth and lowering initial circuit costs. This eliminates the need for complex binder management required by less capable 48-port only board-level vectoring solutions. Ethernet Ring Protection Switching (ERPS) support enables resilient connection of multiple nodes while minimizing aggregation port cost.

The 1148VX is a future-proof solution with four 1/10GigE or GPON/10G PON uplinks ports. As demand grows, the system can be upgraded to 10G uplinks to deliver higher broadband speeds and enhance customer satisfaction.


Integrated primary protection eliminates the need for extra equipment and provides the absolute smallest footprint for the 1148VX vectored VDSL2 system.

ADTRAN 1148VX

Lower Operation and Maintenance Costs

Developed with concern for carrier-field needs, the 1148VX comes with customer-accessible cables that allow for quick replacement of units in the field. Several cable lengths with MS2 or 710 type connectors or unterminated stub are available to accommodate the needs of all service providers. The 1148VX can be remotely provisioned and managed using TL1, Telnet, or SNMP, as well as ADTRAN's next-generation open, SDN-ready Mosaic Cloud Platform providing service providers a path to a Software Defined Access (SD-Access) Network.

RFT-V span, 100-240 VAC , and -48 VDC local powering options are offered within the unit, eliminating the need to order and spare different part numbers for different applications. Span powering from the central office allows for the centralization of battery backup and greatly reduces deployment costs. The 1148VX uses 1 to 8 powering pairs from the central office with the actual pair count dependent on the desired deployment range.

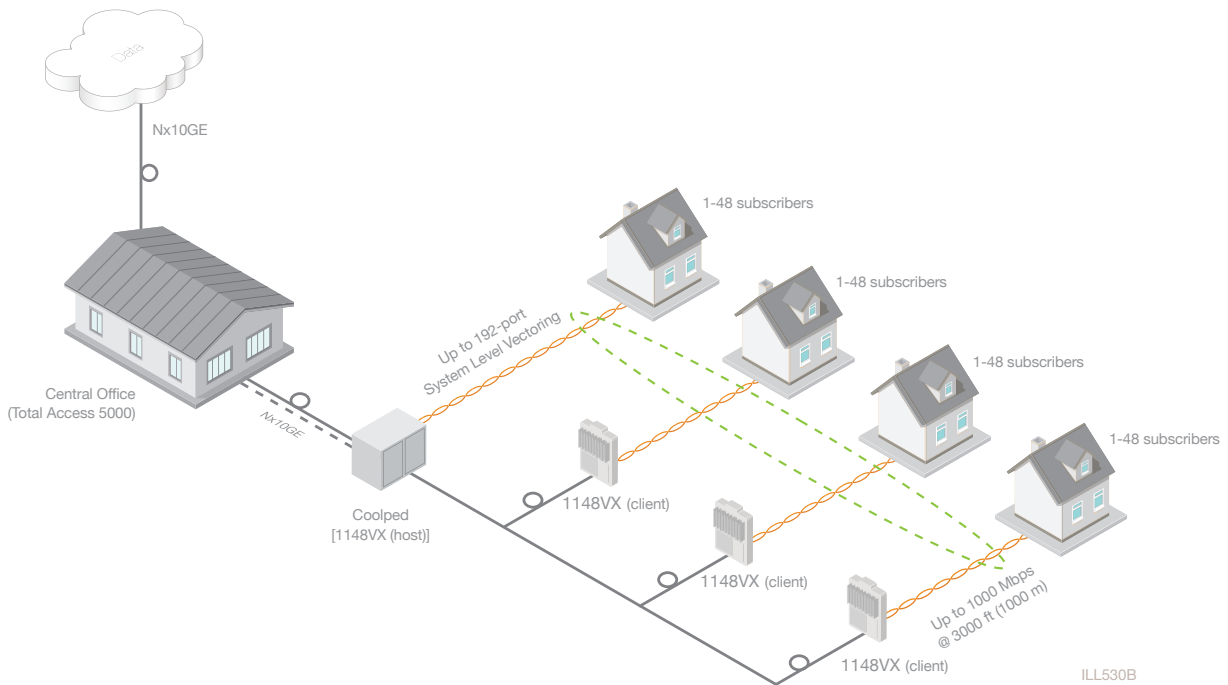

48-Port Sealed, Vectored FTTN

Product Specifications

Mechanical

- **Dimensions:** 22.4 in. x 6.57 in. x 6.4 in. (56.9 cm x 42.1 cm x 15.6 cm) (H x W x D)
- **Weight:** 42 lbs (19 kg)
- **Outdoor Mounting:** Pole, Pedestal, Cross-box, Remote Terminal, other challenging locations

Access

- 48 subscriber ports of VDSL2 for high speed internet.
- Well-suited for 100Mbps services delivery

Network

- 4 x 1/2.5/10GE or GPON/10G PON SFP interfaces
- Resilient Ethernet Ring per ITU-T G.8032 (ERPS))

DMT Specifications

- **Modulation Type:** Discrete Multi-Tone (DMT)
- **Mode:** Full Duplex, Non-overlapped
- **Standards:** T1.413;G.992.1 Annex A; G.992.2 Annex A; G.992.3; G.992.4; G.992.5
- **Number of Pairs (DSL plus POTS):** 48 (one per loop)
- **Downstream Data Rate:**
 - ◆ ADSL2: > 12 Mbps
 - ◆ ADSL2+: > 25 Mbps
 - ◆ VDSL: > 110 Mbps
- **Upstream Data Rate:**
 - ◆ ADSL: Annex A mode – > 1.2 Mbps
 - ◆ ADSL2+: Annex M mode – > 2.5 Mbps
 - ◆ VDSL: Up to 50 Mbps
- **DSL Service Range:** 18,000 feet (5.5 km)

DSL Standards

- ITU G.993.2 (VDSL2)
- ITU G.992.3 (ADSL2)
- ITU G.992.5 (ADSL2+)
- ITU G.993.5 (G.vector)
- G.998.1 (ATM Bonding)
- G.998.2 (EFM Bonding)

VDSL2 Profiles and PSDs

- Profiles 8a-d, 12a-b, 17a
- Annex A and Annex B PSDs

IPTV Services Support

- Internet Group Management Protocol (IGMP) v2 and v3
- Dynamic Host Configuration Protocol (DHCP) Support with option 82

Ethernet Services Support

- Single Stack VLAN and Double Stack VLANs
- (Q-in-Q) Manipulation
- Flexible Traffic Classification
- Ingress Policing and Egress Shaping
- IGMP Snooping and Proxying

Security

- Management AAA via RADIUS and TACACS+
- SSHv1/v2, SFTP, and HTTPS

Diagnostics

- Self Test

Management

- **Local:** Local Craft Interface (DB9, RS-232)
- **Remote:** TL1, Telnet, SNMP, Mosaic Cloud Platform, Advanced Operational Environment (AOE) Management Suite

Environmental

- **Operating Temperature:** –40° F to 149° F (–40° C to 65° C)
- **Storage Temperature:** –40° F to 285° F (–40° C to 85° C)
- **Relative Humidity:** 95%, Non-Condensing
- **Environmentally Hardened:** Fully Sealed, Watertight

Power

- **Local DC Power:** –48 VDC
- **Local AC Power:** 100-240 VAC, 50/60 Hz,
- Auto-ranging AC Power Supply
- **Line Power:** 1 to 8 Line-Powering Pairs

Regulatory Standards

- GR-487-CORE, Issue 4
- NEBS Level 3
- GR-1089-CORE, Issue 6
- GR-63-CORE, Issue 4
- UL 60950-1/22
- RoHS Compliant
- FCC Part 15

ADTRAN 1148VX

Ordering Information

Equipment Options	Part No.		
1148VX Host, ANSI	1179932F1		
1148VX Client, ANSI	1179930F1		
1148VX Host, CALA	1179933F1		
1148VX Client, CALA	1179931F1		
OSP System-Level Vectoring Resource Module (VRM)	1179937F1		
1148VX 384-Port VRM	1179938F1		
OSP SLV Adapter Module	1179939F1		
OSP SLV Cable	1179851G1		
1148V Host to Client Expansion Cable	1179830G1		
Accessories			
1148VX (4th Gen) Pole Mount Bracket	1179779G1		
1148VX (4th Gen) Wall Mount Bracket	1179779G2		
1148VX (4th Gen) Cooled Mount Bracket	1179779G4		
24PR Sealed Power Node	1179880G1		
Cable** Options			
Power			
11xx DC Power Cable (20 feet)	1179810G2		
11xx AC Power Cable (20 feet)	1179810G7		
Span Power (MS2 Connectors) (20 feet)	1179814G2		
Span Power (710 Connectors) (20 feet)	1179814G4		
Span Power (MS2, CAT5 Power/DMT) (5 feet)	1179817F2		
Span Power (710, CAT5 Power/DMT) (5 feet)	1179817F1		
Alarm Input Cable (10 feet)	1179810G5		
POTS, POTS/DSL, Fiber	5 ft. 15 ft. 20 ft.		
Cable Kit, 1148V, CAT5 AMP (MS2)	1179815F2		1179815F4
Cable Kit, 1148V, CAT5 AMP (710)	1179815G1		1179815F3
Cable Kit, 1148V CAT5 STUB		117815F7	1179815F8
100-Pair 24 AWG (MS2)	1179816F1		1179816F2
100-Pair 24 AWG (710)	1179816F4		1179816F5
Cable Kit, 1148V, 24AWG STUB		1179816F7	1179816F8

**Additional cable lengths available for quote. Please email support@adtran.com or call 888-4ADTRAN for pre-sales support.



Pulse Supply
 909 Ridgebrook Road., Sparks, Maryland 21152, USA
 TEL : +1-410-583-1701 FAX : +1-410-583-1704



E-mail: sales@pulsesupply.com
<https://www.pulsesupply.com/adtran>

61179932F1-8D

April Copyright © 2019 ADTRAN, Inc. All rights reserved. ADTRAN believes the information in this publication to be accurate as of publication date, and is not responsible for error. Specifications subject to change without notice. ADTRAN® and the other trademarks listed at www.adtran.com/trademarks are registered trademarks of ADTRAN, Inc. or its affiliates in various countries. All other trademarks mentioned in this document are the property of their respective owners.

ADTRAN warranty duration and entitlements vary by product and geography. For specific warranty information, visit www.adtran.com/warranty.

ADTRAN products may be subject to U.S. export controls and other trade restrictions. Any export, re-export, or transfer of the products contrary to law is prohibited. For more information regarding exportation of ADTRAN items (e.g. commodities, technology, software), please visit www.adtran.com/exportlicense.



ISO 9001
 ISO 14001
 TL 9000