

# MAX BR1 IP55

IP55 Outdoor 4G LTE Router



Water-proof



Dust protected



MIMO Directional



## Waterproof IP55 Enclosure

Deploy the BR1 IP55 with confidence in harsh indoor and outdoor environments. Its waterproof IP55 metal enclosure stands up to dust, vibration, and inclement weather, making it a great choice for industrial, emergency, and other heavy-duty applications.

## Embedded MIMO Antennas

Configure your antenna on the fly. The BR1 IP55's built-in MIMO directional antennas and external antennas are software selectable, so it's easy to optimize antenna performance at any time.

## Built-in PoE & 3-Port Switch

Cut down on cabling and simplify deployments. The BR1 IP55 includes a built-in 3-port LAN switch to reduce clutter and the need for extra equipment. 802.3at PoE+ output is optional add-on, so one wire is all you need for both connectivity and power you can share with security cameras and other devices.

## Features

### WAN

- Support for PPPoE, Static IP, DHCP
- WAN Link Health Check
- Bandwidth Allowance Monitor
- USB 4G/3G Modem Support
- Support for Dynamic DNS services
- WAN Port Convertible into LAN Port

### LAN

- DHCP Server for LAN Clients
- Extended DHCP Options
- DHCP Reservation
- DNS Proxy for LAN Clients
- VLAN on LAN Support

### Load Balancing

- Intelligent Failover
- Session Persistence
- Per-Service Load Distribution
- Multiple Algorithms

### Complete VPN Solution

- PepVPN/SpeedFusion Hot Failover
- Site-to-Site VPN
- Hot Failover
- 256-bit AES Encryption
- Pre-shared Key Authentication
- Dynamic Routing
- X.509 Certificate Support\*
- IPsec VPN (Network-to-Network)#
- X.509 Certificate Support\*

### Advanced QoS

- Individual Bandwidth Limit
- Application Prioritization
- SIP, HTTPS, VPN QoS
- Custom Application QoS

### Networking

- NAT and IP Forwarding
- Static Routes
- Port Forwarding
- Many to One, One to One NAT
- NAT Pool
- SIP ALG, H.323 ALG
- UPnP, NAT-PMP

### Captive Portal Support

- Support for Wired and Wireless LAN Clients
- Support for RADIUS Authentication
- Time and Usage Quotas on Open Access Mode
- Built-in Customizable Splash Page

### Security

- Stateful Firewall
- DoS Prevention
- Web Blocking
- Web Filtering Blacklist

### Device Management

- Web Administrative Interface
- Command Line Interface
- InControl Cloud Management
- Email Notification
- Active Client & Session Lists
- Bandwidth Usage Statistics
- Syslog Service
- SNMP v1, v2c and v3

\* Feature is available as an upgrade.



# IPsec VPN supports connection with Cisco, Juniper, Peplink, or Pepwave devices.

# MAX BR1 IP55

IP55 Outdoor 4G LTE Router

## Specifications

MAX BR1 IP55	
WAN Interface	1x GE 1 x Embedded LTE Modem
LAN Interface	2 x GE
Wi-Fi Interface	802.11ac wave 2/ac/a/b/g/n Wi-Fi WAN and AP
Drop-in Mode	●
Router Throughput	100 Mbps
Recommended Users	1-60
Antenna	Cellular: Build-in/ External SMA Connector Wi-Fi: Build-in, Directional/ Omni Software Configuration
Power Input #	802.3at PoE+ (56V Pepwave Passive PoE Input is Needed for full 1x 802.3at PoE+ LAN Output#)
Power Consumption	Max.: 18W, Typical: 11W, Min.: 8W
Dimensions	11.8 x 4.9 x .175 inches 300 x 124 x 44.5 mm
Weight	0.96 pounds 435 grams
Operating Temperature	-40 ° – 149 °F -40 ° – 65 °C
Humidity	15% – 95% (non-condensing)
Certifications	CE, RoHS
Warranty	1-Year Limited Warranty
Package Content	MAX BR1 IP55 2 x Plastic Cable Tie

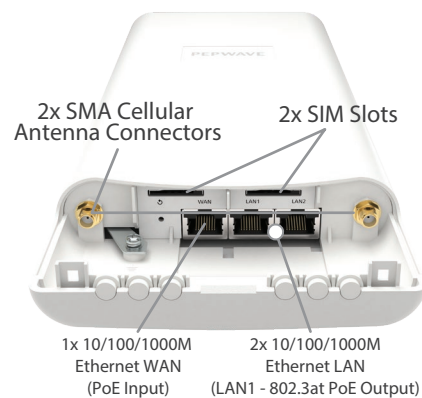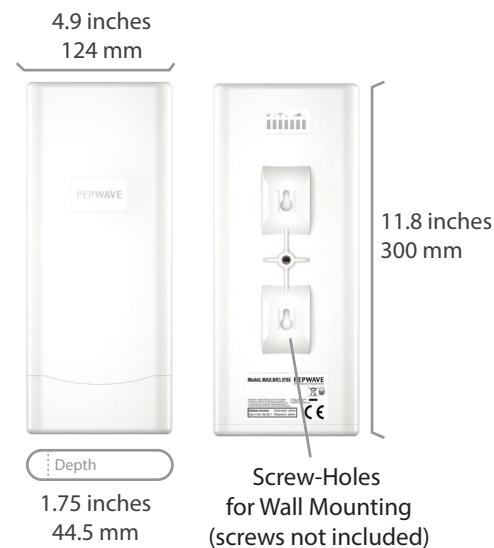

# PoE injector available separately.

## Ordering Information

	Product Code	Region/Carrier	Embedded Modem	4G Bands	3G Bands	VPN Functionality
LTEA	MAX-BR1-LTEA-W-IP55	Worldwide / CAT-6	1	FDD LTE: B1, B2, B3, B4, B5, B7, B8, B12, B13, B20, B25, B26, B29, B30, B41	WCDMA/HSPA+/DC-HSPA+: B1, B2, B3, B4, B5, B8	PepVPN
	MAX-BR1-LTEA-P-IP55	Asia Pacific / CAT-6	1	B1, B3, B5, B7, B8, B18, B19, B21, B28, B38, B39, B40, B41	WCDMA/HSPA+/DC-HSPA+: B1, B5, B8, B9, B19 UMTS: B6 TD-SCDMA: B39	PepVPN
4G LTE	MAX-BR1-LTE-E-IP55	Europe / International / CAT-4	1	4G LTE B1, B3, B5, B7, B8, B20, B38, B40, B41	WCDMA/HSPA+/DC-HSPA+: B1, B5, B8	PepVPN

## Accessories

Product Code	Product Name	Description
ACW-107	802.3at PoE Injector	PoE Injector IEEE 802.3at compliant
ACW-109	Passive PoE Kit for IP55 Outdoor Products	Include 56V/2.1A PSU and Passive PoE Injector Enable 1x full power 25W 802.3at PoE output of IP55 Enclosure products
ACW-510	Ball Joint Mount	Ball Joint Mount for IP55 enclosure