



TERMINAL SERVERS  
WITH DUAL  
IPV4/IPV6 STACK



# CONNECTPORT TS 8/16



8 and 16 port terminal servers provide 232 only or 232/422/485 selectable serial connectivity for critical applications

ConnectPort® TS 8/16 serial servers provide secure, easy RS-232 or RS-232/422/485 serial-to-Ethernet integration of virtually any device into wired Ethernet networks. They are ideal for use in a wide variety of demanding applications such as automation, robotics control, centralized device monitoring and management, data acquisition, and point-of-sale applications requiring COM/TTY ports, serial tunnelling or TCP/UDP functionality.

Enhanced access control, management and configuration capabilities support key security requirements for critical infrastructure and distributed systems. A built-in Python environment enables application development and customization at the device level, including full device connection control, data manipulation and event based actions.

The ConnectPort TS implements Digi's patented RealPort® COM port redirection software which provides local serial port functionality. The ConnectPort supports both host-initiated and device-initiated RealPort connection modes. SSH, SSL, TCP and UDP connectivity are also supported to each port.

Management of the device is possible through Digi Remote Manager, web services, CLI and SNMP connectivity with mass configuration and customization tools available to pre-configure devices prior to deployment.


## BENEFITS

- Low latency connectivity for sensitive applications
- 8 or 16 RS-232 or software selectable RS-232/422/485 serial ports
- Dual IPv4/IPv6 stack
- Easy-to-use Python development environment for custom applications
- Tx/Rx LEDs per serial port
- Patented RealPort® technology for COM/TTY port control/ management
- Web proxy support
- Per user access controls
- Dedicated console port
- Digi Remote Manager® support
- SSL/TLS and SSHv2 for added security

## APPLICATION EXAMPLE



### FACTORY AUTOMATION

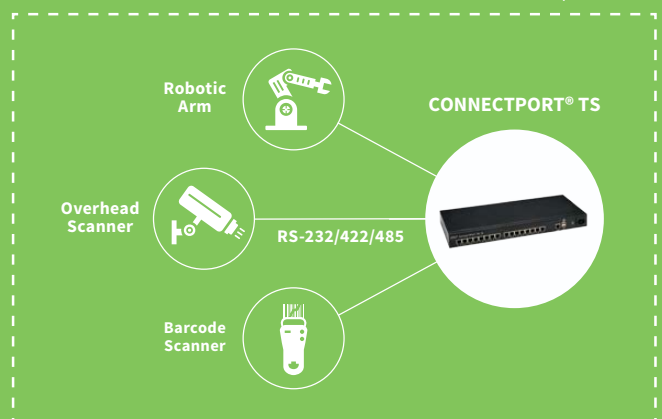


## RELATED PRODUCTS



SPECIFICATIONS		ConnectPort TS 8 ConnectPort TS 8 MEI	ConnectPort TS 16 ConnectPort TS 16 MEI
<b>PERFORMANCE</b>			
<b>MANAGEMENT</b>	HTTP/HTTPS, SSH or Telnet; Optional secure enterprise management via Digi Remote Manager®		
<b>PROTOCOLS</b>	IPv4/IPv6, UDP/TCP, DHCP, Extended Telnet RFC 2217, Telnet, Reverse Telnet, SSH direct to serial port, Modbus/TCP to Modbus protocol conversion support		
<b>SOFTWARE</b>	Patented RealPort® COM port redirector (server initiated or device initiated); RFC 2217; Python support		
<b>OPERATING SYSTEMS</b>	Microsoft Windows® 7, 8, 8.1, 10 and Windows Server® 2012, 2016, 2019; and Linux®		
<b>STATUS LEDS</b>	Serial: Tx/Rx; Ethernet: Link/Activity, Diagnostic		
<b>DIMENSIONS (L X W X H)</b>	10.5 cm x 19.6 cm x 3.3 cm (4.15 in x 7.7 in x 1.3 in)	43.18 cm x 17.65 cm x 4.1 cm (17 in x 6.95 in x 1.62 in)	
<b>WEIGHT</b>	1.86 kg (4.1 lb)	2.3 kg (5 lb)	
<b>SECURITY</b>	HTTPS, SSL, SSL/TLS, SSHv2, FIPS 197, SNMPv2, PPP		
<b>INTERFACES</b>			
<b>SERIAL</b>			
<b>PORTS</b>	8 RS-232 serial ports MEI version: 8 RS-232/422/485 serial ports (software selectable)	16 RS-232 serial ports MEI version: 16 RS-232/422/485 serial ports (software selectable)	
<b>THROUGHPUT</b>	Up to 230 Kbps per port		
<b>SIGNAL SUPPORT</b>	TXD, RXD, RTS, CTS, DTR, DSR, DCD, RI		
<b>ETHERNET</b>			
<b>PHYSICAL LAYER</b>	10/100 Base-T		
<b>DATA RATE</b>	10/100 Mbps		
<b>MODE</b>	Full or half duplex		
<b>USB</b>			
<b>PORTS</b>	2 ports @ .5 A max per port		
<b>POWER REQUIREMENTS</b>			
<b>POWER INPUT</b>	9-30 VDC @ .8 A max	AC: 100-240 VAC, 50/60 Hz, 0.4 A DC: 36-72 VDC .700 A (max)	
<b>POWER SUPPLY</b>	12 VDC power supply for 0° C to 60° C (32° F to 140° F) with locking barrel connector included; Extended temperature power supply available	AC: Internal power supply, 100 to 250 VAC, 50-60 Hz DC: Internal power supply, 32-72 VDC	
<b>POWER CONSUMPTION</b>	Typical: 6 W (500 mA @ 12 VDC) Max: 12 W (1 A @ 12 VDC)	Typical: 8 W; Max: 15 W	
<b>PRODUCT SURGE PROTECTION (ESD)</b>	4 kV burst (EFT) per EN61000-4-4; 2 kV surge transient per EN61000-4-5	1 kV burst (EFT) per EN61000-4-4; 2 kV surge transient per EN61000-4-5	
<b>ENVIRONMENTAL</b>			
<b>OPERATING TEMPERATURE</b>	0° C to 60° C (32° F to 140° F)	0° C to 55° C (32° F to 131° F)	
<b>STORAGE TEMPERATURE</b>	-35° C to 85° C (-31° F to 185° F)		
<b>RELATIVE HUMIDITY</b>	5 to 95% (non-condensing)		
<b>ETHERNET ISOLATION</b>	1500 VAC min per IEEE 802.3/ABSU X 3.263		
<b>SERIAL PORT PROTECTION (ESD)</b>	15 Kv human body model		
<b>APPROVALS</b>			
<b>SAFETY</b>	UL60950-1, EN/IEC 60950-1, CAN/CSA C22.2 No. 60950, CUL60950-1-03		
<b>EMISSIONS/IMMUNITY</b>	FCC Part 15 Subpart B Class A, EN55024, EN55022, AS/NZS CISPR 22, EN61000-3-2, 3		

## PRODUCT IMAGES

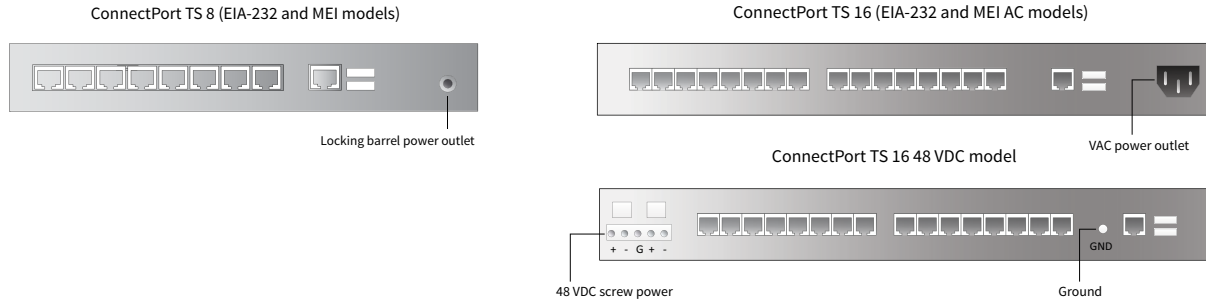

PART NUMBERS	DESCRIPTION
70002534	ConnectPort TS 16 MEI
70002388	ConnectPort TS 16
70002538	ConnectPort TS 16 48 VDC
70002323	ConnectPort TS 8
70002329	ConnectPort TS 8 MEI

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2020 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91001527  
B8/720



909 Ridgebrook Road., Sparks, Maryland 21152, USA  
TEL : +1-410-583-1701 FAX : +1-410-583-1704  
E-mail: [sales@pulsesupply.com](mailto:sales@pulsesupply.com)  
<https://www.pulsesupply.com/digi-products>

